


**AFX-BM** 


**AFX-PVC** 



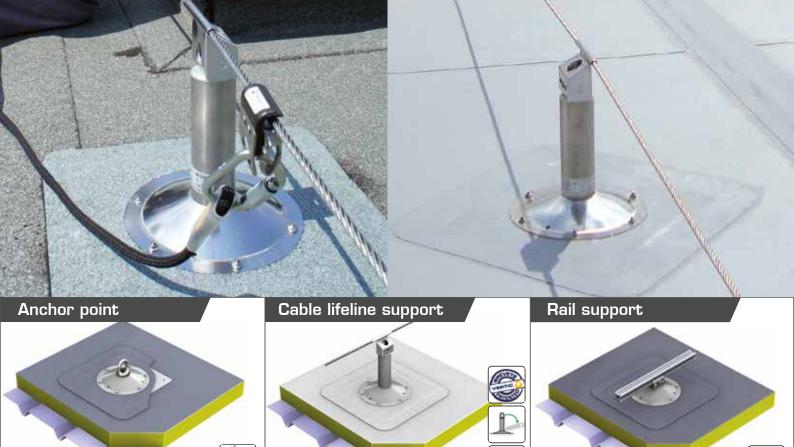

AFX-BM-PA

AFX-PVC-PA



Bitumen or PVC membranes



## PRODUCT ADVANTAGES

- ✓ Installation directly on the waterproofed membrane
- ✓ One single central fixing is used to make the link to the steel deck

R.AFX-BM


R.AFX-PVC

- Location is independent from the framework
- Available in 4 fixing version, to be installed on perforated deck (please contact us for further details)
- Available in a version for wooden support

## **BBC FIXING**

In order to meet the requirements of the **Thermal Regulation RT2012 (ISO 10211),** a specific fixing is available.

- Extremely low thermal bridge to ensure the lack of condensation
- Air tightness where the steel deck is perforated
- · Continuous insulation around the fixing

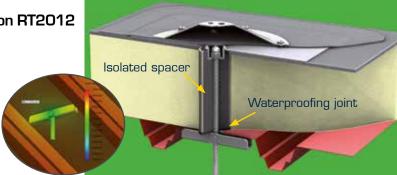

Tel: +33(0)4 76 13 12 15 Fax: +33(0)4 76 13 12 16 support@vertic.fr